

HYPERTOUCH

EMOTIONAL SURFACES

A BRAND OF IRIS CERAMICA GROUP

BXICG-MFB04

16A Multifunction Four Channel Actuator

technical support: hypertouch@iris-group.it



Via Radici Nord, 112 - 42014 Castellarano (RE) IT

TECHNICAL DATA

Number of Outputs	4
Ohmic Load	16A
Voltage	230VAC
Max Inrush Current	170A/2ms
Output Life Expectancy (mech.)	1.000.000
Power Supply	via KNX bus
Operation Temperature Range	[0-45]°C
Enclosure	IP20
Design	91 x 72 x 62 mm


OPERATING PARTS

1. KNX bus terminal.
2. Programming key.
3. Red programming Led.
4. Output power screw terminals.
5. Buttons for manual actuation.
6. Green ON/OFF Led.

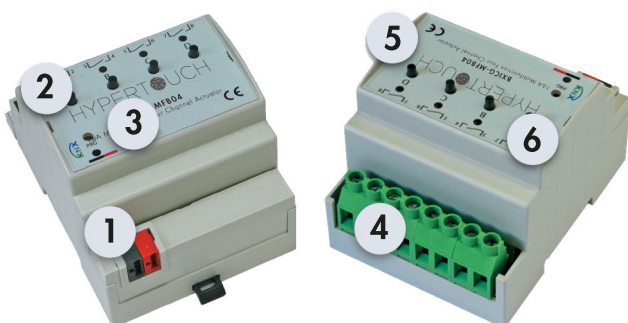

INSTALLATION

1. Place the Switch Actuator on DIN 35mm rail.
2. Connect the Switch Actuator to the KNX bus.
3. Wire up the Switch Actuator as described in the circuit diagram.
4. Switch on KNX power supply and provide ETS program.

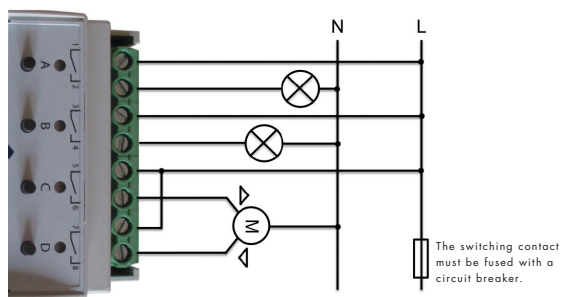

DATA SHEETS



Operating Instructions
for authorized electricians

IMPORTANT SAFETY NOTES

Danger High Voltage: screw terminals can support 230VAC x 16A loads.
Disconnect the main power supplies before installation or disassembly.

Installation and commissioning of the device can only be carried out by authorized electricians. The relevant standards, directives, regulations and instructions must be observed.
The device has the CE mark.