



HYPERTOUCH

EMOTIONAL SURFACES



A BRAND OF  IRIS CERAMICA GROUP

BXICG-4XIO

KNX Universal Interface - 4 inputs

technical support: hypertouch@iris-group.it

Via Radici Nord, 112 - 42014 Castellarano (RE) IT

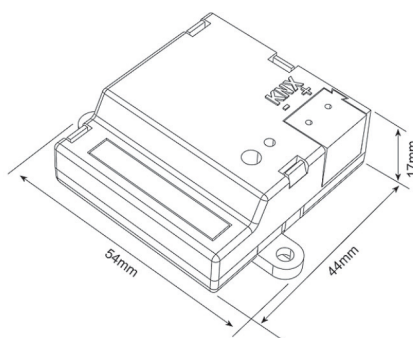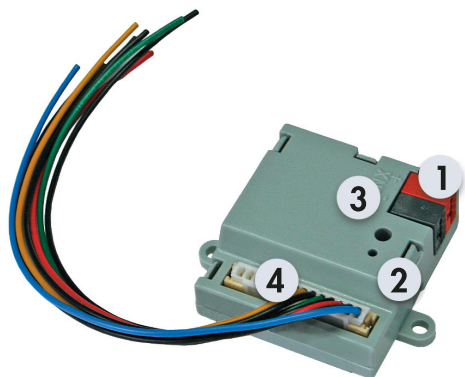


OPERATING PARTS

1. KNX bus terminal.
2. Programming key.
3. Red programming Led.
4. I/O cables.

INSTALLATION

1. Connect the Universal I/O Interface to the KNX cable.
2. Wire up the Universal I/O Interface as described in the circuit diagram.
3. Insert Universal I/O Interface in a wiring box or an accessible area or inspectable area.
4. Switch on KNX power supply and provide ETS program.

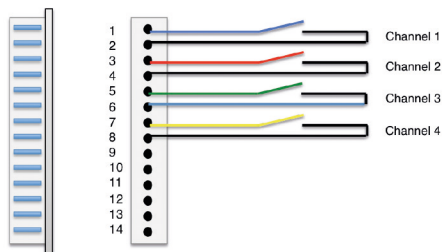

TECHNICAL DATA

Number of Inputs	4
Internal Contact Voltage	3,3V
Permitted Wire Gauge	KNX terminal (0,8mm ²)
Power Supply	KNX bus (29V)
Power Consumption	<0,25W
Permitted Input Cable Length	10m
Operation Temperature Range	[0-45]°C
Enclosure	IP20
Design	54 x 44 x 17 mm

DATA SHEETS



Operating Instructions
for authorized electricians

IMPORTANT SAFETY NOTES

Installation and commissioning of the device can only be carried out by authorized electricians. The relevant standards, directives, regulations and instructions must be observed. The device has the CE mark.